



architectural

# Kap 5.7" Round LED

Ceiling Recessed Trimless Fixed Downlight

## Description

Kap Recessed combines a trimless edge, exquisitely textured finish and deep recess of the highest quality LED or halogen light source to form a sculptural blend of architecture and science. When installed, the ceiling appears as if crafted from a thick, rich material and the room glows with striking colors rendered in crisp white light.

## Lamps

- LED: Xicato  
17W, 1400lm, 2700K, CRI 98, 50°  
19.5W, 2000lm, 3000K, CRI 80, 50°

## Construction

- Cast aluminum specular reflector with a matte finish
- Lamp module is diffused with a low mineral content, color neutral, polymeric diffuser

## Notes

- Fixture comes with separate trimless installation frame which allows for installation in sheet rock and special construction ceilings up to 1.2" thick
- Listings: UL Listed, IP44 damp location

## Electrical

- Fixture is constant current, low voltage 17W or 19.5W LED (integral)
- Non-IC rated splice box for retrofit or new construction contains 0-10v constant current dimmable driver

## Housing





- Non-IC rated housing for new construction, 20 ga. sheetmetal supplied within (2) mounting bars and removable mounting brackets
- Non-IC rated splice box for retrofit and new construction available

## Photometrics

For current IES files please visit [usa.flos.com](http://usa.flos.com)

## Warranty

2 years from date of sale

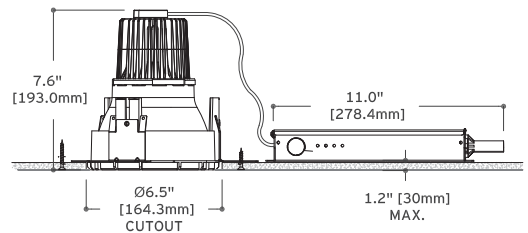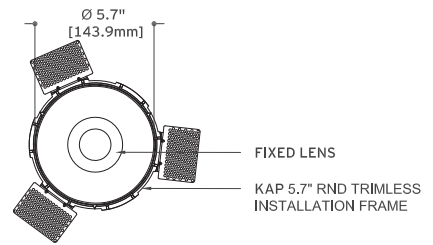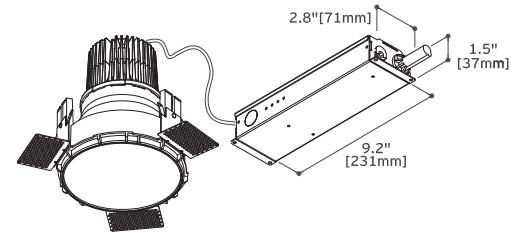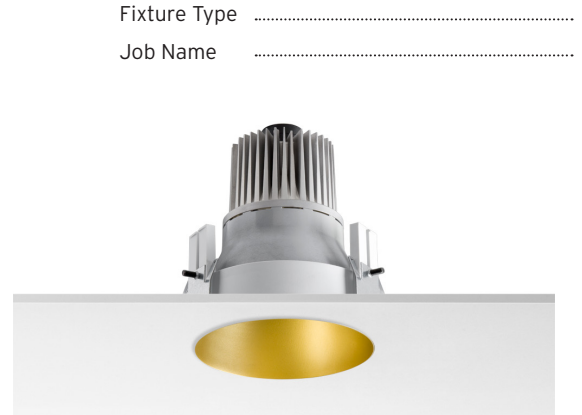

## How to Specify ex. 03.4496.GL.B90

QTY	Item Number	Description	Finish	Power Supply
	03.4496	Kap Recessed 5.7" Round, LED, 17W, 1400lm, 2700K, CRI 98	<input type="checkbox"/> 74 = Black <input type="checkbox"/> B1 = White <input type="checkbox"/> BU = Blue <input type="checkbox"/> CU = Copper <input type="checkbox"/> GL = Gold	B90 = Housing with LED driver, non-dimmable, 120-277V B9V = Housing with LED driver, 0-10V, 120-277V BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V
	03.4420	Kap Recessed 5.7" Round, LED, 19.5W, 2000lm, 3000K, CRI 80	<input type="checkbox"/> 74 = Black <input type="checkbox"/> B1 = White <input type="checkbox"/> BU = Blue <input type="checkbox"/> CU = Copper <input type="checkbox"/> GL = Gold	B90 = Housing with LED driver, non-dimmable, 120-277V B9V = Housing with LED driver, 0-10V, 120-277V BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V





architectural

# Kap 5.7" Round LED

Ceiling Recessed Trimless Fixed Downlight

Housing 08.8528.00B90 Ceiling Recessed

### Description

Housing Kap 145 LED , 120-277, Not Dimmable

Housing 08.8528.00B9V Ceiling Recessed

### Description

Housing Kap 145 LED , 120-277, 1-10V Dimmable

Fixture Type .....

Job Name .....

