



architectural

# Kap 4.1" Round LED

Ceiling Recessed Trimless Fixed Direct

## Description

Kap Recessed combines a trimless edge, exquisitely textured finish and deep recess of the highest quality LED source to form a sculptural blend of architecture and science. When installed, the ceiling appears as if crafted from a thick, rich material and the room glows with striking colors rendered in crisp white light.

## Lamps

- LED: Xicato  
11.7W, 1300lm, 3000K, CRI 80, 38°  
15.6W, 1300lm, 2700K, CRI 98, 38°

## Construction

- Cast aluminum specular reflector with a matte finish behind lens cone
- Lamp module is diffused with a low mineral content, color neutral, polymeric diffuser

## Notes

- Fixture comes with separate trimless installation frame which allows for installation in sheet rock and special construction ceilings up to 1.2" thick
- Listings: UL Listed, IP44 damp location

## Electrical

- Fixture is constant current, low voltage 11.7W or 15.6W LED (integral)
- Non-IC rated splice box for retrofit or new construction contains 0-10v constant current dimmable driver

## Housing

- Non-IC rated housing for new construction, 20 ga. sheetmetal supplied within (2) mounting bars and removable mounting brackets
- Non-IC rated splice box for retrofit and new construction available

## Photometrics




For current IES files please visit [usa.flos.com](http://usa.flos.com)

## Warranty

2 years from date of sale

Fixture Type .....

Job Name .....

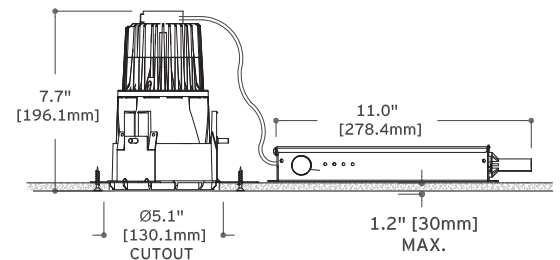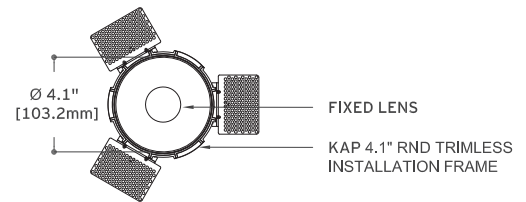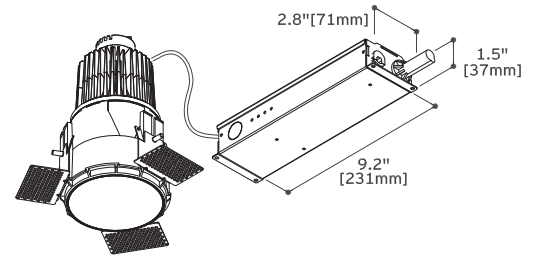

## How to Specify ex. 03.4407.GL.B90

QTY	Item Number	Description	Finish	Power Supply
	03.4407	Kap Recessed 4.1" Round, LED, 11.7W, 1300lm, 3000K, CRI 80	<input type="checkbox"/> 74 = Black <input type="checkbox"/> B1 = White <input type="checkbox"/> BU = Blue <input type="checkbox"/> CU = Copper <input type="checkbox"/> GL = Gold	B90 = Housing with LED driver, non-dimmable, 120-277V B9V = Housing with LED driver, 0-10V, 120-277V BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V
	03.4494	Kap Recessed 4.1" Round, LED, 15.6W, 1300lm, 2700K, CRI 98	<input type="checkbox"/> 74 = Black <input type="checkbox"/> B1 = White <input type="checkbox"/> BU = Blue <input type="checkbox"/> CU = Copper <input type="checkbox"/> GL = Gold	B90 = Housing with LED driver, non-dimmable, 120-277V B9V = Housing with LED driver, 0-10V, 120-277V BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V





architectural

# Kap 4.1" Round LED

Ceiling Recessed Trimless Fixed Direct

Housing 08.8537.00B90 Ceiling Recessed

### Description

Kap Recessed 4.1" Round, LED, Accessory housing, 120-277 Not dimmable

Fixture Type .....

Job Name .....

