



architectural

Kap 4.1" Squared LED

Ceiling Recessed Fixed Downlight

Description

Kap Recessed combines a trimless edge, exquisitely textured finish and deep recess of the highest quality LED source to form a sculptural blend of architecture and science. When installed, the ceiling appears as if crafted from a thick, rich material and the room glows with striking colors rendered in crisp white light.

Lamps

- LED: Xicato
11.7W, 1300lm, 3000K, CRI 80, 45°
15.6W, 1300lm, 2700K, CRI 98, 45°

Construction

- Cast aluminum specular reflector with a matte finish
- Lamp module is diffused with a low mineral content, color neutral, glass diffuser

Notes

- Fixture comes with separate trimless installation frame which allows for installation in sheet rock and special construction ceilings up to 1.2" thick
- Listings: UL Listed, IP44 damp location

Electrical

- Fixture is constant current, low voltage 11.7W or 15.6W LED (integral)
- Non-IC rated splice box for retrofit or new construction contains 0-10v constant current dimmable driver

Housing

- Non-IC rated housing for new construction, 20 ga. sheetmetal supplied within (2) mounting bars and removable mounting brackets
- Non-IC rated splice box for retrofit and new construction available

Photometrics





For current IES files please visit usa.flos.com

Warranty

2 years from date of sale

Fixture Type

Job Name

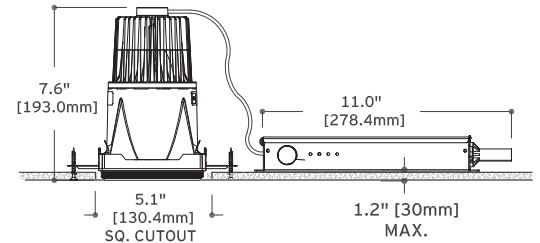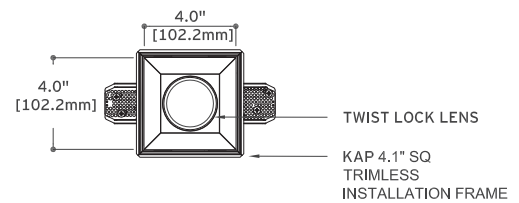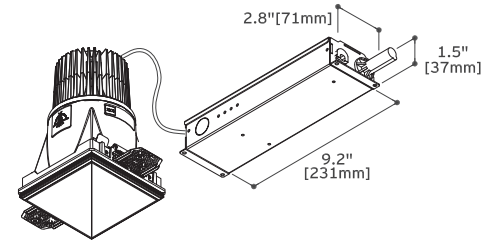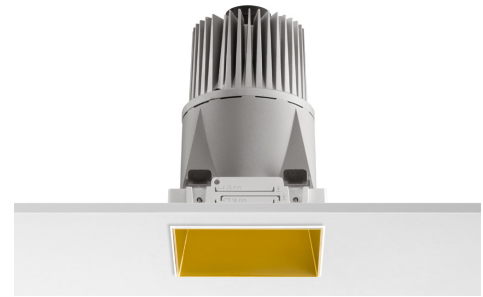

How to Specify ex. 03.4570.GL.B90

QTY	Item Number	Description	Finish	Power Supply
	03.4570	Kap Recessed 4.1" Square, LED, 11.7W, 1300lm, 3000K, CRI 80	<input type="checkbox"/> 74 = Black <input type="checkbox"/> B1 = White <input type="checkbox"/> BU = Blue <input type="checkbox"/> CU = Copper <input type="checkbox"/> GL = Gold	B90 = Housing with LED driver, non-dimmable, 120-277V B9V = Housing with LED driver, 0-10V, 120-277V BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V
	03.4595	Kap Recessed 4.1" Square, LED, 15.6W, 1300lm, 2700K, CRI 98	<input type="checkbox"/> 74 = Black <input type="checkbox"/> B1 = White <input type="checkbox"/> BU = Blue <input type="checkbox"/> CU = Copper <input type="checkbox"/> GL = Gold	B90 = Housing with LED driver, non-dimmable, 120-277V B9V = Housing with LED driver, 0-10V, 120-277V BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V





architectural

Kap 4.1" Squared LED

Ceiling Recessed Fixed Downlight

Housing 08.8534.00B90 Ceiling Recessed

Description

Kap Recessed 4.1" Squared, LED, Accessory housing, 120-277 Not dimmable

Fixture Type

Job Name

