



architectural

Solid Pure Ceiling

Ceiling Monopoint Directional Accent

Description

The Solid Pure is a family of high output indoor track lights suitable for any commercial application or high mounting application, where a lot of light is required from one source. Available up to 5500 lumens each, the Solid Pure is line voltage. The perfect operation of the LED module is guaranteed thanks to its heat dissipation system, which permits constant recirculation of the air on the inside.

Lamps

- LED: Bridgelux
- 23W, 2000lm, 3000K, CRI 90
- 23W, 2300lm, 3000K, CRI 80
- 23W, 2500lm, 4000K, CRI 80
- 30W, 2700lm, 3000K, CRI 90
- 30W, 3300lm, 3000K, CRI 80
- 30W, 3500lm, 4000K, CRI 80
- 35W, 3100lm, 3000K, CRI 90
- 35W, 3800lm, 3000K, CRI 80
- 35W, 4000lm, 4000K, CRI 80
- 53W, 4300lm, 3000K, CRI 90
- 53W, 5200lm, 3000K, CRI 80
- 53W, 5500lm, 4000K, CRI 80

Notes

- Locking mechanism fixes angle horizontally (360° rotation) and vertically (190° rotation)
- Beam spreads available in 10°, 18° and 25° for 23 watt version. Beam spreads available in 15°, 22° and 45° for 30/35/53W versions
- Listings: UL Listed, IP 20 dry rated only

Electrical

- Fixture is constant current, low voltage LED with integral power supply
- Fixture is 23 watts, 30 watts, 35 watts, or 53 watts (model dependent)
- Track heads use three-phase track

Construction

- Fixture body is cast aluminum
- Accessory holding ring houses up to two lenses or one anti-glare element
- All optics are made of aluminium with specular finish

Photometrics




For current IES files please visit usa.flos.com

Warranty

2 years from date of sale

Fixture Type

Job Name

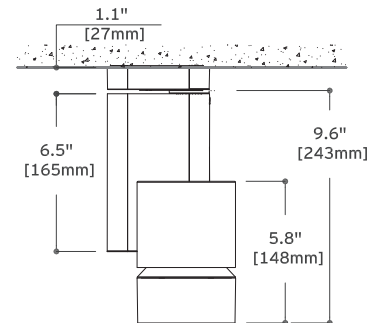

How to Specify ex. 09.2891.30.90

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	09.2891	10		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2892	18	Solid Pure Ceiling, LED, 23W, 2000lm, 3000K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2893	25		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V





architectural

Solid Pure Ceiling

Ceiling Monopoint Directional Accent

Fixture Type

Job Name

How to Specify (cont'd)

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	09.2894	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2895	22	Solid Pure Ceiling, LED, 23W, 2300lm, 3000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2896	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2865	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2866	22	Solid Pure Ceiling, LED, 23W, 2500lm, 4000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2867	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2873	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2874	22	Solid Pure Ceiling, LED, 30W, 2700lm, 3000K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2875	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2876	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2877	22	Solid Pure Ceiling, LED, 30W, 3300lm, 3000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = Grey	90 = Integral non-dimming driver, 120-277V
	09.2878	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V





architectural

Solid Pure Ceiling

Ceiling Monopoint Directional Accent

Fixture Type

Job Name

How to Specify (cont'd)

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	09.2882	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2883	22	Solid Pure Ceiling, LED, 30W, 3500lm, 4000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2884	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2994	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2995	22	Solid Pure Ceiling, LED, 35W, 3100lm, 3000K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2996	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2956	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2957	22	Solid Pure Ceiling, LED, 35W, 3800lm, 3000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2958	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2962	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2963	22	Solid Pure Ceiling, LED, 35W, 4000lm, 4000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2964	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V





architectural

Solid Pure Ceiling

Ceiling Monopoint Directional Accent

Fixture Type

Job Name

How to Specify (cont'd)

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	09.2980	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2981	22	Solid Pure Ceiling, LED, 53W, 4300lm, 3000K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2982	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2968	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2969	22	Solid Pure Ceiling, LED, 53W, 5200lm, 3000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2970	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2974	15		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2975	22	Solid Pure Ceiling, LED, 53W, 5500lm, 4000K, CRI 80	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V
	09.2976	45		<input type="checkbox"/> 14 = Black <input type="checkbox"/> 30 = White	90 = Integral non-dimming driver, 120-277V





architectural







Solid Pure Ceiling

Ceiling Monopoint Directional Accent

Fixture Type

Job Name

Optional Accessories

Image	QTY	Item Number	Description
		08.8768.14	Ring to hold lenses and honeycomb louvre in place
		08.8763.14	Honeycomb anti-glare louvre (Ring required)
		08.8766.64.0D	Dark blue filter (Ring required)
		08.8766.65.0D	Blue filter (Ring required)
		08.8766.66.0D	Amber filter (Ring required)
		08.8766.67.0D	Red filter (Ring required)

