



architectural

# Light Supply Fixed, Trimless

Ceiling Recessed Trimmed Fixed Downlight

Fixture Type .....

Job Name .....

## Description

A range of compact LED downlights capable of up to 3000 lm output, specially designed for public spaces and retail installations. Offering a wide range of options, optics and accessories, the Light Supply is available in fixed, wall-washer and adjustable versions, as well as trimmed and trimless, making a complete family that can be used throughout a project for many different lighting needs.

## Lamps

- LED: Xicato  
26W, 2280lm, 3000K, CRI 98, 50°  
28W, 3000lm, 3000K, CRI 80, 50°  
28W, 3000lm, 4000K, CRI 80, 50°

## Notes

- Trimless versions must be mounted in a standard pre-installation metal frame (shipped separately with product) or in a Soft Architecture technology installation plate for 1/2" thick ceilings
- Spot, medium and flood reflectors are available as accessories to change the light beam angle
- 10.9" (277mm) minimum plenum height
- Housing details available upon request
- Listings: UL Listed, IP44 damp location

## Electrical

- Fixture is constant current, low voltage 28/26W LED (integral)
- Each fixture requires a separate power supply.
- Available with splice box, containing 0-10 volt dimmable constant current driver.

## Construction




- The Fixed Trim version is available with external black or white ring combined with internal white or chrome reflector.
- Injection molded specular reflector with a matte finish.
- Die cast aluminum lamp body.
- Accessories include: pre-installation frame or Soft Architecture installation plate. Available finishes: white (40) and black (14)

## Photometrics

For current IES files please visit [flosusa.com](http://flosusa.com)

## Warranty

2 years from date of sale

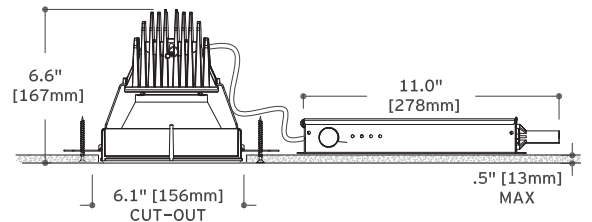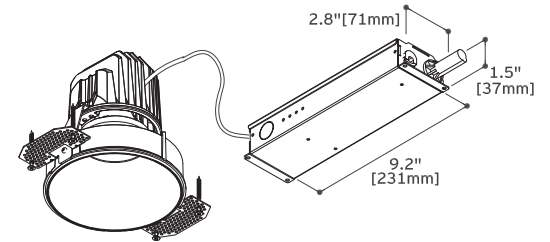

**How to Specify** ex. 03.6624.40.90 + 08.8589.00.90 (Housing) + 08.8359.00.90 (Install frame)

| QTY | Item Number | Description  | Finish  | Power Supply   | Required Accessories  |
|-----|-------------|--|---|--|---|
|     | 03.6624     | Light Supply Fixed Trimless, LED, 28W, 3000lm, 3000K, CRI 80 | <input type="checkbox"/> 06 = Aluminum<br><input type="checkbox"/> 40 = White | 90 = Housing with LED driver 1000mA, non-dimmable, 120V<br>UL = Splice box, 1% dim, 0-10V, 120V<br>7U = Splice box, 1% dim, 0-10V, 277V<br>GT = Splice box, 10% dim, ELV, 120V | 08.8589.00.90 Light Supply Housing + 08.8359.00.90 No Trim Installation Frame<br><br>08.8359.00.90 No Trim Installation Frame |
|     | 03.6625     | Light Supply Fixed Trimless, LED, 28W, 3000lm, 4000K, CRI 80 | <input type="checkbox"/> 06 = Aluminum<br><input type="checkbox"/> 40 = White | 90 = Housing with LED driver 1000mA, non-dimmable, 120V<br>UL = Splice box, 1% dim, 0-10V, 120V<br>7U = Splice box, 1% dim, 0-10V, 277V<br>GT = Splice box, 10% dim, ELV, 120V | 08.8589.00.90 Light Supply Housing + 08.8359.00.90 No Trim Installation Frame<br><br>08.8359.00.90 No Trim Installation Frame |
|     | 03.6626     | Light Supply Fixed Trimless, LED, 26W, 2280lm, 3000K, CRI 98 | <input type="checkbox"/> 06 = Aluminum<br><input type="checkbox"/> 40 = White | 90 = Housing with LED driver 830mA, ELV, 120V<br>UL = Splice box, 1% dim, 0-10V, 120V<br>7U = Splice box, 1% dim, 0-10V, 277V<br>GT = Splice box, 10% dim, ELV, 120V           | 08.8593.00.90 Light Supply Housing + 08.8359.00.90 No Trim Installation Frame<br><br>08.8359.00.90 No Trim Installation Frame |





architectural







# Light Supply Fixed, Trimless

Ceiling Recessed Trimmed Fixed Downlight

Fixture Type .....

Job Name .....

## Optional Accessories

| Image   | QTY | Item Number | Description  |
|---|-----|-------------|--|
|    |     | 08.8118.68  | Elliptical lens  |
|    |     | 08.8177.68  | Flood lens   |
|    |     | 08.8242.14  | Black painted aluminium cross baffle                         |
|   |     | 08.8049.14  | Honeycomb anti-glare louvre (small cells)                    |
|  |     | 08.8377.14  | Honeycomb anti-glare louvre (big cells)                      |
|  |     | SA.6600.01  | Soft Architecture installation frame for 1/2" thick ceilings |

