



architectural

# Light Supply Wall Washer, Trimmed

Ceiling Recessed Trimmed Fixed Wall-Wash

## Description

A range of compact LED downlights capable of up to 3000 lm output, specially designed for public spaces and retail installations. Offering a wide range of options, optics and accessories, the Light Supply is available in fixed, wall-washer and adjustable versions, as well as trimmed and trimless, making a complete family that can be used throughout a project for many different lighting needs. Lamp orientation is easy, precise, and reliable through an intuitive mechanism.

## Lamps

- LED: Xicato  
26W, 2280lm, 3000K, CRI 98  
28W, 3000lm, 3000K, CRI 80  
28W, 3000lm, 4000K, CRI 80

## Notes

- Fixture comes with separate trimless installation frame which allows for installation in sheet rock and special construction ceilings up to 1/2" thick
- No Trim versions must be mounted in a standard pre-installation metal frame or in a Soft Architecture technology installation frame for 1/2" thick ceilings
- Spot, medium and flood reflectors are available as accessories to change the light beam angle without needing to dismount the fixture from the ceiling
- 11.4" (290mm) minimum plenum height
- Listings: UL Listed, IP44 damp location

## Electrical

- Fixture is constant current, low voltage 26 or 28W LED (integral)
- Available with splice box, containing 0-10 volt dimmable constant current driver

## Construction

- Adjustable version features a dismantlable optic support cylinder, to be easily unscrewed from the luminaire, in order to completely access the electronic and to install the professional accessories available.
- Injection molded specular reflector with a matte finish.
- Die cast aluminum lamp body.
- Accessories include: elliptical distribution lens and anti-glare grid in aluminium cells with black liquid paint finish, Pre-installation frame or Soft Architecture installation plate. Available finishes: white (40) and black (14)

## Photometrics


For current IES files please visit [flosusa.com](http://flosusa.com)

## Warranty

For current IES files please visit [flosusa.com](http://flosusa.com)

Fixture Type .....

Job Name .....

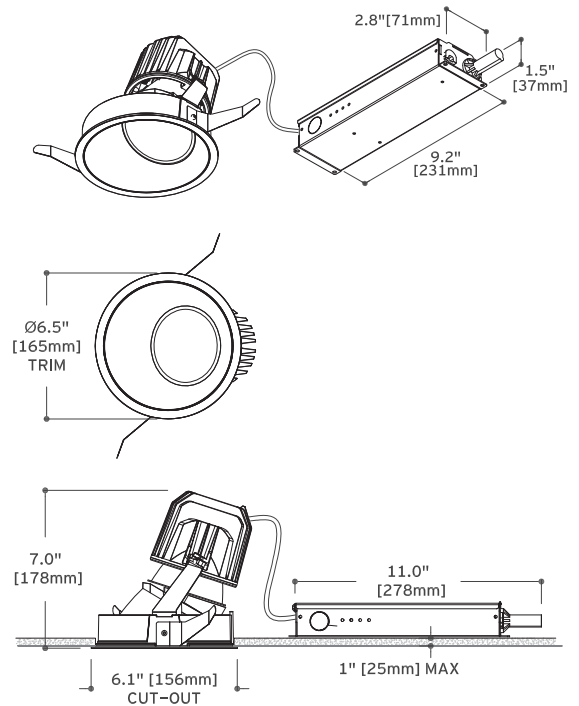

## How to Specify ex. 03.6614.3C.90

QTY	Item Number	Description	Finish (Trim/Reflector)	Power Supply
	03.6614	Light Supply Wall-Washer Trimmed, LED, 26W, 2280lm, 3000K, CRI 98	<input type="checkbox"/> 1B = Black/White <input type="checkbox"/> 1C = Black/Aluminum <input type="checkbox"/> 3B = White/White <input type="checkbox"/> 3C = White/Aluminum	90 = Housing with LED driver 830mA, ELV, 120V UL = Splice box, 1% dim, 0-10V, 120V 7U = Splice box, 1% dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V
	03.6612	Light Supply Wall-Washer Trimmed, LED, 28W, 3000lm, 3000K, CRI 80	<input type="checkbox"/> 1B = Black/White <input type="checkbox"/> 1C = Black/Aluminum <input type="checkbox"/> 3B = White/White <input type="checkbox"/> 3C = White/Aluminum	90 = Housing with LED driver 1000mA, non-dimmable, 120V UL = Splice box, 1% dim, 0-10V, 120V 7U = Splice box, 1% dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V
	03.6613	Light Supply Wall-Washer Trimmed, LED, 28W, 3000lm, 4000K, CRI 80	<input type="checkbox"/> 1B = Black/White <input type="checkbox"/> 1C = Black/Aluminum <input type="checkbox"/> 3B = White/White <input type="checkbox"/> 3C = White/Aluminum	90 = Housing with LED driver 1000mA, non-dimmable, 120V UL = Splice box, 1% dim, 0-10V, 120V 7U = Splice box, 1% dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V





architectural







# Light Supply Wall Washer, Trimmed

Ceiling Recessed Trimmed Fixed Wall-Wash

Fixture Type .....

Job Name .....

## Optional Accessories

Image	QTY	Item Number	Description
		08.8118.68	Elliptical lens
		08.8177.68	Flood lens
		08.8242.14	Black painted aluminium cross baffle
		08.8049.14	Honeycomb anti-glare louvre (small cells)
		08.8377.14	Honeycomb anti-glare louvre (big cells)
		SA.6600.01	Soft Architecture installation frame for 1/2" thick ceilings

