

The Black Line Trimmed

Ceiling Recessed Fixed Downlight

Description

The Black Line is a small profile fixed downlight available in trimmed and trimless options. Glare is so well managed you will not believe the fixture is on. Recessed unobtrusively above the ceiling, the compact Black Line projects a powerful glare-free line of light to the task below. This is the art and optical science of illumination presented in a compact 2-5/8" high design. Specially designed silicone cones that are magnetically fixed on a compact aluminum extrusion are removable to access the reflectors, which can be changed out on the site. The cones cover each of the system's LED modules providing maximum cut-off to enhance visual comfort.

Lamps

LED: CREE
 3.2W, 200lm, 3000K, CRI 90
 3.2W, 197lm, 2700K, CRI 90

Delivered lumen from 313lm up to 2330lm.

Construction

Lamp modules have injection molded lenses with a matte finish and high temperature resistant silicone glare shields

Silicone glare shields are held on with magnets

Notes

Spotlights are available in 10° and 50° options

Fixtures cannot be mounted end to end

Listings: UL Listed, IP 20 dry rated only

Electrical

Fixture is constant current, low voltage LED

13 watts per linear foot

Total wattage: (2) lamp modules = 6.5 watts,
 (4) lamp modules = 13 watts, (8) lamp modules = 26 watts, (12) lamp modules = 39w

IC rated splice box for retrofit or new construction contains 0-10v constant current dimmable driver





Splice box can be accessed by removing fixture from ceiling

Photometrics

For current IES files please visit usa.flos.com

Warranty

2 years from date of sale.

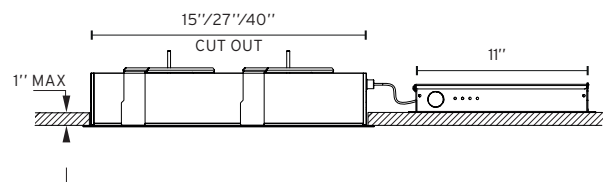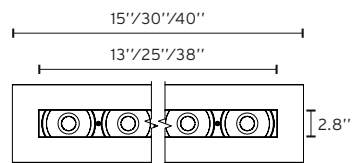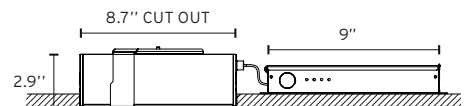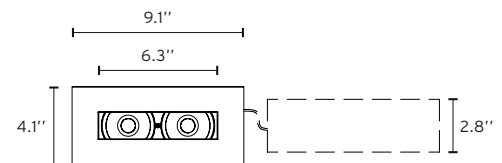

The Black Line Trimmed
Ceiling Recessed Trimmed Fixed Downlight

How to Specify ex. 03.0050.00AUL

Item Number	Beam Angle	Description	Finish	Power Suply
03.0050	10°	Black Line 2 spots Trimmed, 8.3", 6.5W, 400lm, 3000K, CRI 90	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 00 = Primer	AUL = Splice box, 1% dim, 0-10V, 120-277V
03.0052	50°			
03.0051	10°	Black Line 2 spots Trimmed, 8.3", 6.5W, 394lm, 2700K, CRI 90		
03.0053	50°			
03.0054	10°	Black Line 4 spots Trimmed, 14.6", 13W, 800lm, 3000K, CRI 90		
03.0056	50°			
03.0055	10°	Black Line 4 spots Trimmed, 14.6", 13W, 788lm, 2700K, CRI 90		
03.0057	50°			
03.0058	10°	Black Line 8 spots Trimmed, 27", 26W, 1600lm, 3000K, CRI 90		
03.0060	50°			
03.0059	10°	Black Line 8 spots Trimmed, 27", 26W, 1576lm, 2700K, CRI 90		
03.0061	50°			
03.0062	10°	Black Line 12 spots Trimmed, 39.8", 39W, 2400lm, 3000K, CRI 90		
03.0064	50°			
03.0063	10°	Black Line 12 spots Trimmed, 39.8", 39W, 2364lm, 2700K, CRI 90		
03.0065	50°			