

## Johnny 80 (3.2") 1L Square Ceiling Semi-Recessed Spot

### Description

LED luminaire for recessed mounting into plasterboard ceilings. Illumination system consisting of one or two adjustable lights in a recessed version (trim or trimless) or in a semi recessed version. Available in two sizes: 80 mm (3.2") and 120 mm (4.7") in round and square versions. The Johnny 120 is supplied with two frame rings (black and white), which should be fitted to the product if a trimmed version is required, or without, if a Trimless version is required. An exclusive, easy and adjustable system that enables an accurate adjustment of the light beam. The Trimless Ø80 mm (3.2") version has an exclusive Fast&Perfect installation tool.

### Lamps

POWER LED : CREE  
 6.2W, 600lm, 3000K, CRI90  
 6.2W, 560lm, 2700K, CRI90

Delivered lumen from 284 lm up to 378 lm

### Construction

Luminaire body made of die cast aluminum

Should ready Honeycomb louver and cross baffle.

Factory suggest 5" minimum plenum height.

### Electrical

Fixture is constant current, low voltage LED with integral power supply.

Fixture is 6.2 watts.

### Finish

40 White       14 Black



CE Concrete       TK Teak



### Notes

Semi-Recessed luminaire for LED light source.

Beam spreads available in 14°, 23° and 33°.

The Johnny 80 (3.2") version has an orientation system integrated into the telescopic body.

Maximum rotation 360°

Maximum tilt angle 40°





Listings: UL listed, IP20

### Warranty

2 years from date of sale.

### Photometrics

For current IES files please visit [architectural.flosusa.com](http://architectural.flosusa.com)

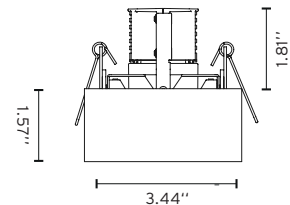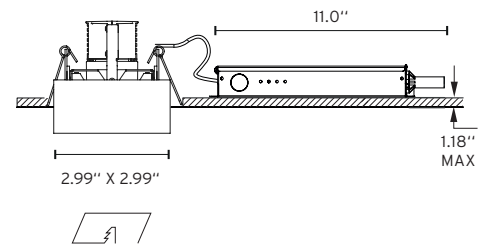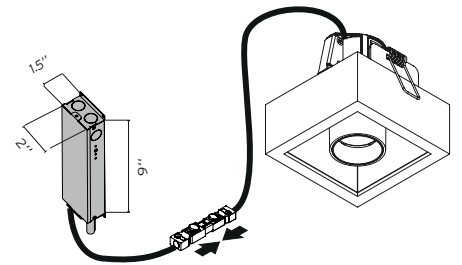

## Johnny 80 (3.2") 1L Square Ceiling Semi-Recessed Spot

How to Specify ex. 03.0719.CE.UL

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	03.0719	14°	Johnny 80 Semi-Recessed 1L, 6.2W, 560lm, 2700K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0718	14°	Johnny 80 Semi-Recessed 1L, 6.2W, 600lm, 3000K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0721	23°	Johnny 80 Semi-Recessed 1L, 6.2W, 560lm, 2700K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0720	23°	Johnny 80 Semi-Recessed 1L, 6.2W, 600lm, 3000K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0723	33°	Johnny 80 Semi-Recessed 1L, 6.2W, 560lm, 2700K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0722	33°	Johnny 80 Semi-Recessed 1L, 6.2W, 600lm, 3000K, CRI 90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V

**Johnny 80 (3.2") 1L Square**  
Ceiling Semi-Recessed Spot

**Optional Accessories**

Image	QTY	Item Number	Description
		<p>TRAY-0027</p>	<p>Registration Tray -non electrical, place holder for non IC new construction, 2.99 x 2.99"</p>