

UT Pro 150

Track Mounted Directional Accent

Description

The UT Spot is a family of high output indoor track light suitable for any application, from museum exhibitions to commercial premises and offices or residential environments.

The UT pro 150 serie is an exclusive projector, which combined with an electronic integrated within the body of the luminaire, allows for minimum visual impact.

The optical housing of the luminaire is manufactured in high-pressure injected aluminum, with white or black finishes. UT PRO 150 is available with Spot, Medium and Flood optics and a built-in high-efficiency borosilicate glass reflector.

Lamps

LED ARRAY: Citizen
22.5W, 2690lm, 3000K, CRI 90
22.5W, 2800lm, 4000K, CRI 90
22.5W, 3250lm, 3000K, CRI 80

Delivered lumen from 1959 lm up to 2444 lm

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Finish

40 White

14 Black



Construction

Fixture body is high pressure injected aluminium.

Light module is available for Spot, Medium and Flood optics, with a high-efficient borosilicate glass reflector included.

Electrical

Fixture is constant current, low voltage LED with integral power supply.

Track heads are designed for use with standard three circuit track.

Fixture is 22.5 watts.




Notes

360° rotation on the vertical axle.

90° rotation on the horizontal axle.

Beam spreads available in 16°, 28° y 40°.

Track head wattage is model dependant.

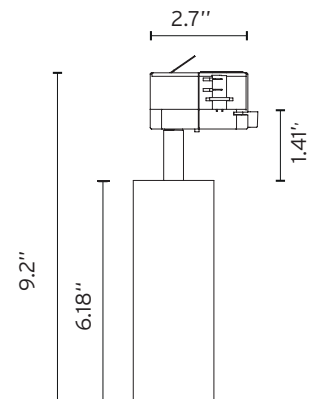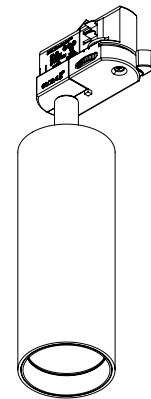

UT Pro 150

Track Mounted Directional Accent





How to Specify ex. 09.7236.40A90

QTY	Item Number	Beam Angle	Description	Finish	Power Suply
	09.7236	16°	UT PRO 150 TR GA69, 22.5W, 2690lm, 3000K, CRI 90	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7231	16°	UT PRO 150 TR GA69, 22.5W, 2800lm, 4000K, CRI 90	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7230	16°	UT PRO 150 TR GA69, 22.5W, 3250lm, 3000K, CRI 80	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7237	28°	UT PRO 150 TR GA69, 22.5W, 2690lm, 3000K, CRI 90	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7233	28°	UT PRO 150 TR GA69, 22.5W, 2800lm, 4000K, CRI 90	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7232	28°	UT PRO 150 TR GA69, 22.5W, 3250lm, 3000K, CRI 80	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7238	40°	UT PRO 150 TR GA69, 22.5W, 2690lm, 3000K, CRI 90	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7235	40°	UT PRO 150 TR GA69, 22.5W, 2800lm, 4000K, CRI 90	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V
	09.7234	40°	UT PRO 150 TR GA69, 22.5W, 3250lm, 3000K, CRI 80	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90= Integral non-dimming driver, 120V-277V


UT Pro 150

Track Mounted Directional Accent

Optional Accesories

Image	QTY	Item Number	Description
		08.8429.00	Cross Baffle
		08.8431.00	Elliptical lens (to use with the holding ring)
		08.8432.00	Flood lens (to use with the holding ring)
		08.8428.00	Honeycomb anti-glare louvre

Track Required

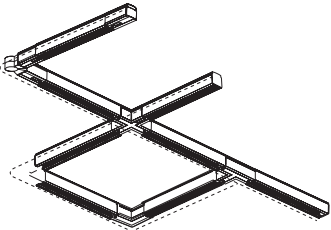Image	Description
	Contact FLOS sales agent for configuration of layout and specification information