

UT Pro 175

Track Mounted Directional Accent

Description

The UT Spot is a family of high output indoor track light suitable for any application, from museum exhibitions to commercial premises and offices or residential environments.

The UT pro 175 serie is an exclusive projector, which combined with an integrated electronic driver within the body of the luminaire, creates a minimal visual impact.

The optical housing of the luminaire is manufactured in high-pressure injected aluminum, with white or black finishes. UT PRO 175 is available with Spot, Medium and Flood optics and a built-in high-efficiency borosilicate glass reflector.



Lamps

LED ARRAY: Citizen
 35.3W, 4145lm, 3000K, CRI 80
 35.3W, 3425lm, 3000K, CRI 90
 35.3W, 3569lm, 4000K, CRI 90

Delivered lumens from 2903lm up to 3691lm

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Finish

40 White

14 Black



Construction

Fixture body is high pressure injected aluminium.

Light module is available for Spot, Medium and Flood optics, high-efficiency borosilicate glass reflector.

Electrical

Fixture is constant current LED with integral power supply (120V).

Track heads are designed for use with standard three circuit track.

Fixture is 35.3 watts.


Notes

360° rotation on the vertical axis.


90° rotation on the horizontal axis.

Beam spreads available in 12°, 25° y 35°.

Track head wattage is model dependant.

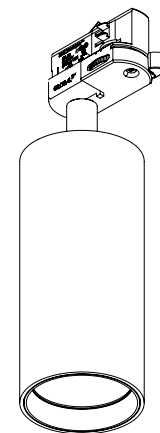


2.7"



9.2"

6.18"

1.41"



∅ 2.24"

UT Pro 175

Track Mounted Directional Accent


How to Specify ex. 09.7310.14.90

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	09.7310	12°	UT PRO 175, 35.3W, 4145lm, 3000K, CRI 80, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7311	12°	UT PRO 175, 35.3W, 3425lm, 3000K, CRI 90, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7312	12°	UT PRO 175, 35.3W, 3569lm, 4000K, CRI 90, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7313	25°	UT PRO 175, 35.3W, 4145lm, 3000K, CRI 80, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7314	25°	UT PRO 175, 35.3W, 3425lm, 3000K, CRI 90, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7315	25°	UT PRO 175, 35.3W, 3569lm, 4000K, CRI 90, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7316	35°	UT PRO 175, 35.3W, 4145lm, 3000K, CRI 80, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7317	35°	UT PRO 175, 35.3W, 3425lm, 3000K, CRI 90, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V
	09.7318	35°	UT PRO 175, 35.3W, 3569lm, 4000K, CRI 90, UL	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	90= Integral non-dimming driver, 120V-277V

UT Pro 175

Track Mounted Directional Accent

Track Required

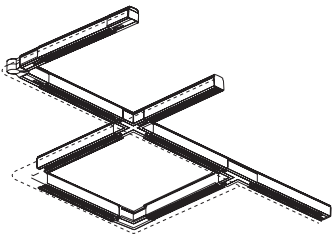Image	Description
	Contact FLOS sales agent for configuration of layout and specification information