

UT D57 Spot Downlight Trimless

Ceiling Recessed Directional Accent

Description

The UT Spot is a family of high output indoor lights suitable for any application, from museum exhibitions to commercial premises and offices or residential environments.

Remodel type IC rated employing remote drivers, for indoor use to be mounted on ceilings & displays, available in LED sources with choice of lumens, color temperature or beam.. in ELV& FF or 1-10V dimming versions.

The UT Spot Downlight version can operate as downlight (up position) or as adjustable spotlight (down position).

The optical housing of the luminaire is in high-pressure injected aluminium, with white or black finishes.

Lamps

LED ARRAY : Citizen
18W, 2150lm, 3000K, CRI 80
18W, 1780lm, 3000K, CRI 90
18W, 1900lm, 4000K, CRI 90

Delivered lumen from 1189 lm up to 1664 lm

Construction

Fixture body is high pressure injected aluminium.

All optics are made of aluminium with specular finish.

Photometrics

For current IES files please visit architectural.usa.flos.com

Finish

30 White

14 Black



Electrical

Fixture is constant current, low voltage LED with integral power supply.

Fixture is 18 watts.

Notes

Maximum tilt angle 90°


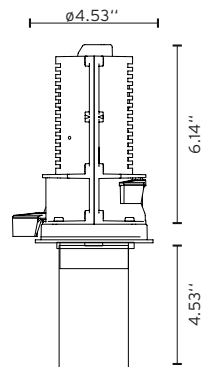

Maximum rotation 365°

Beam spreads available in 12°, 23° and 40°

Listings: UL Listed, IP20 dry location only, Class 2

Warranty

2 years from date of sale.







UT D57 Spot Downlight Trimless

Ceiling Recessed Directional Accent

How to Specify ex. 09.4519.30AGS + 08.8994.30 + SP25W450MA-10V-A02

QTY	Item Number	Beam Angle	Description	Finish	Power Suply
	09.4519 09.4520 09.4521	12° 23° 40°	UT Spot D57 Downlight Trimless, 18W, 2150lm, 3000K, CRI 80	☐ 30 = White ■ 14 = Black	AGS = Remote power Supply, order separately
	09.4522 09.4523 09.4524	12° 23° 40°	UT Spot D57 Downlight Trimless, 18W, 1780lm, 3000K, CRI 90	☐ 30 = White ■ 14 = Black	AGS = Remote power Supply, order separately
	09.4525 09.4526 09.4527	12° 23° 40°	UT Spot D57 Downlight Trimless, 18W, 1900lm, 4000K, CRI 90	☐ 30 = White ■ 14 = Black	AGS = Remote power Supply, order separately

Required Accessories





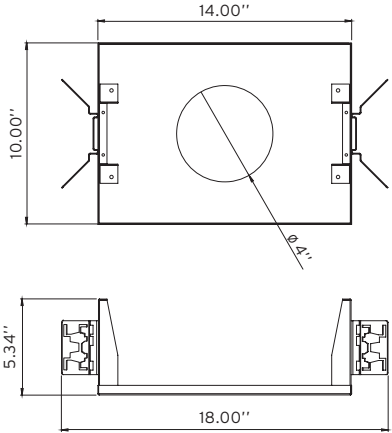
Image	QTY	Item Number	Description
		08.8994.30	Pre-Installation frame Trimless version, White
		08.8994.14	Pre-Installation frame Trimless version, Black.
		SP25W450MA-10V-A02	Splice Box UL 7''x3-5/8''x1-1/4'', UL. With Driver Programmed to 500mA , 25W, 0-10V Dimmable, 120/277V / Required for Canada
		SP40W450MA-10V-A02	Splice Box UL 7''x3-5/8''x1-1/4'', UL. With Driver Programmed to 450mA , 40W, 0-10V Dimmable, 120/277V

Consult factory for ELV driver options.

UT D57 Spot Downlight Trimless

Ceiling Recessed Directional Accent

Optional Accesories

Image	QTY	Item Number	Description
		08.8429.00	Cross baffle
		08.8431.00	Elliptical lens
		08.8432.00	Flood lens
		08.8428.00	Honeycomb anti-glare louvre
		TRAY-0006	Registration tray -non electrical, place holder for non IC new construction, ø 4"