

Kap 105 (4.1") Round LED

Ceiling Recessed Trimless Fixed Downlight

Description

Kap Recessed combines a trimless edge, exquisitely textured finish and deep recess of the highest quality LED or halogen light source to form a sculptural blend of architecture and science. When installed, the ceiling appears as if crafted from a thick, rich material and the room glows with striking colors rendered in crisp white light.

Lamps

LED: Xicato
 11.7W, 1300lm, 3000K, CRI 80, 38°
 15.6W, 1300lm, 2700K, CRI 98 38°

Delivered lumen from 341 lm up to 729 lm

Construction

Cast aluminum specular reflector with a matte finish behind lens cone
 Lamp module is diffused with a low mineral content, color neutral, polymeric diffuser

Photometrics

For current IES files please visit
usa.flos.com

Finish

B1 White CU Copper 74 Black



BU Blue GL Matt Gold



Electrical

Fixture is constant current, low voltage 11.7W or 15.6W LED (integral)

Non-IC rated splice box for retrofit or new construction contains 0-10V or ELV constant current dimmable driver




Notes

A pre-installation trimless frame which allows for installation in sheet rock and special construction ceilings up to 1.2" thick has to be ordered separately

Listings: UL listed, IP44 damp location

Warranty

2 years from date of sale.

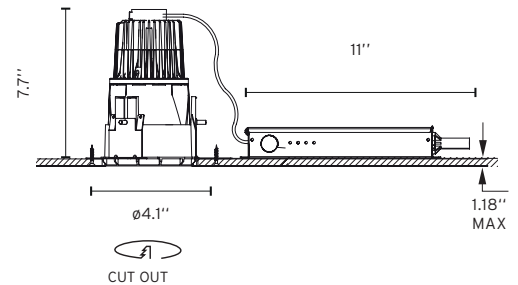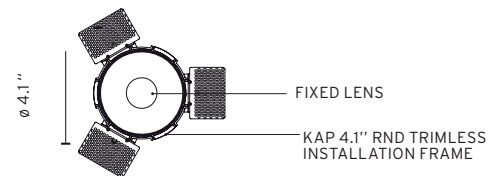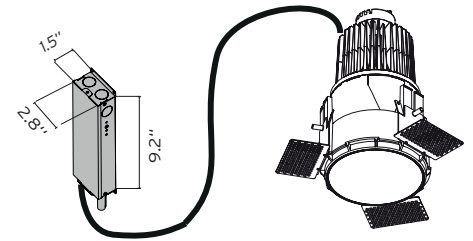


How to Specify

ex. 03.4407.GLBUL


QTY	Item Number	Description	Finish	Power Supply
	03.4407	Kap 105 (4.1") Round, LED, 11.7W, 1300lm, 3000K, CRI 80	<input type="checkbox"/> B1 = White <input type="checkbox"/> 74 = Black <input type="checkbox"/> CU = Cooper <input type="checkbox"/> BU = Blue <input type="checkbox"/> GL = Gold	BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V
	03.4494	Kap 105 (4.1") Round, LED, 15.6W, 1300lm, 2700K, CRI 98	<input type="checkbox"/> B1 = White <input type="checkbox"/> 74 = Black <input type="checkbox"/> CU = Cooper <input type="checkbox"/> BU = Blue <input type="checkbox"/> GL = Gold	BUL = Splice Box, 1% dim, 0-10V, 120V B7U = Splice Box, 1% dim, 0-10V, 277V BGT = Splice box, 10% Dim, ELV, 120V

Kap 105 (4.1") Round LED
Ceiling Recessed Trimless Fixed Downlight

Required Accessories

Image	QTY	Item Number	Description
		08.8155.00	Trimless Installation Frame Kap 105 (4.1") Round

Optional Accessories

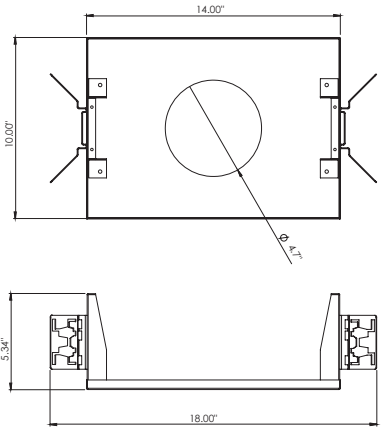Image	QTY	Item Number	Description
		TRAY-0008-2	Registration tray -non electrical, place holder for non IC new construction, Kap 105 (4.1") Trimless, \varnothing 4.7" Installation frame included