

Light Supply Wall Washer, Trimmed

Ceiling Recessed Trimmed Fixed Wall-Wash

Description

A range of compact LED downlights capable of up to 3000 lm output, specially designed for public spaces and retail installations. Offering a wide range of options, optics and accessories, the Light Supply is available in fixed, wall-washer and adjustable versions, as well as trimmed and trimless, making a complete family that can be used throughout a project for many different lighting needs. Lamp orientation is easy, precise, and reliable through an intuitive mechanism.

Lamps

LED: Xicato
 26W, 2280lm, 3000K, CRI 98
 28W, 3000lm, 3000K, CRI 80
 28W, 3000lm, 4000K, CRI 80

Delivered lumen from 1354 lm up to 1967 lm

Construction

Adjustable version features a dismantable optic support cylinder, to be easily unscrewed from the luminaire, in order to completely access the electronic and to install the professional accessories available.

Injection molded specular reflector with a matte finish.

Die cast aluminum lamp body.

Accessories include: pre-installation frame or Soft Architecture installation plate. Available finishes: white (40) and black (14)

Photometrics

For current IES files please visit architectural.flosusa.com

Finish

40 White 06 Aluminium



Electrical

Fixture is constant current, low voltage 26W or 28W LED (integral)

Available with splice box, containing 0-10V or ELV dimmable constant current driver.

Notes

Fixture comes with separate trimless installation frame which allows for installation in sheet rock and special construction ceilings up to 1/2" thick

No Trim versions must be mounted in a standard pre-installation metal frame or in a Soft Architecture technology installation frame for 1/2" thick ceilings


Spot, medium and flood reflectors are available as accessories to change the light beam angle without needing to dismount the fixture from the ceiling

11.4" (290mm) minimum plenum height

Listings: UL Listed, IP44 damp location

Warranty

2 years from date of sale.

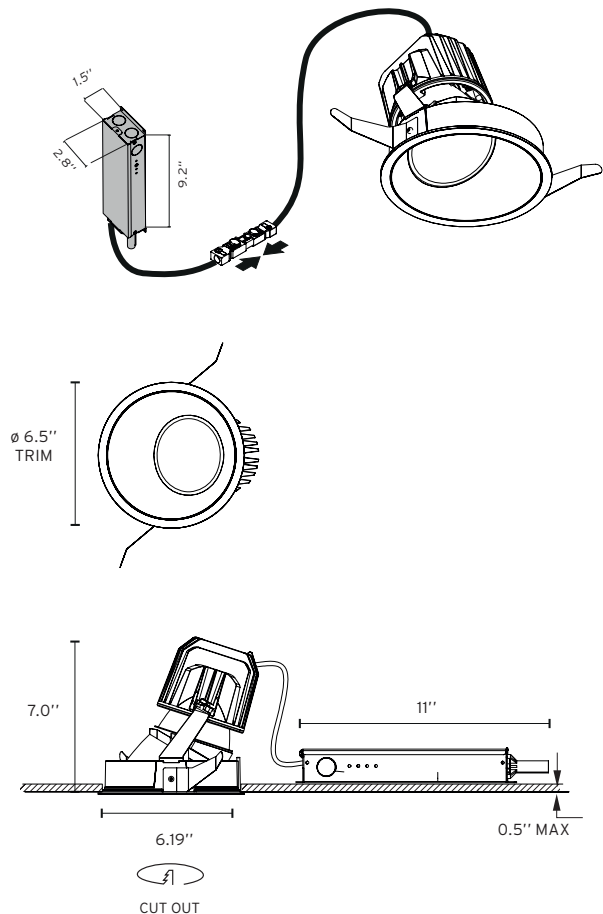

Light Supply Wall Washer, Trimmed

Ceiling Recessed Trimmed Fixed Wall-Wash

How to Specify ex. 03.6614.3C.UL

Item Number	Description	Finish	Power Supply
03.6614	Light Supply Wall-Washer Trimmed, LED, 26W, 2280lm, 3000K, CRI 98	<input type="checkbox"/> 1B = Black / White <input type="checkbox"/> 1C = Black / Aluminium <input type="checkbox"/> 3B = White / White <input type="checkbox"/> 3C = White / Aluminium	90 = Housing with LED driver 830mA, ELV, 120V UL = Splice Box, 1% Dim, 0-10V, 120V 7U = Splice Box, 1% Dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V
03.6612	Light Supply Wall-Washer Trimmed, LED, 28W, 3000lm, 3000K, CRI 80	<input type="checkbox"/> 1B = Black / White <input type="checkbox"/> 1C = Black / Aluminium <input type="checkbox"/> 3B = White / White <input type="checkbox"/> 3C = White / Aluminium	90 = Housing with LED driver 830mA, ELV, 120V UL = Splice Box, 1% Dim, 0-10V, 120V 7U = Splice Box, 1% Dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V
03.6613	Light Supply Wall-Washer Trimmed, LED, 28W, 3000lm, 4000K, CRI 80	<input type="checkbox"/> 1B = Black / White <input type="checkbox"/> 1C = Black / Aluminium <input type="checkbox"/> 3B = White / White <input type="checkbox"/> 3C = White / Aluminium	90 = Housing with LED driver 830mA, ELV, 120V UL = Splice Box, 1% Dim, 0-10V, 120V 7U = Splice Box, 1% Dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V

Optional Accesories

Image	QTY	Item Number	Description
		TRAY-0007	Registration tray -non electrical, place holder for non IC new construction, ø 6.19"