

Battery 3L Trimless

Ceiling Recessed Downlight

Description

1, 2 or 3 lamp adjustable system, for recessed ceiling thicknesses up to 30mm (1.2") . Suitable for use with LED lamps capable up to 2290lm output per point of light. The Battery family is available in trimmed and trimless options.

Lamps

LED : Bridgelux
3x 16.5W, 3x 2159lm, 3000K, CRI80

Notes

The installation frame has to be order separately

Maximum tilt angle 40°

Beam spreads available in 29° and 44°

Optional fill ers to be ordered separately

Listings: UL Listed, IP20

Installation frame ordered separately, when ordering registration tray the installation frame is included.

Warranty

2 years from date of sale

Photometrics

For current IES fil s please visit
architectural.fl susa.com

Finish

■ 14 Black



Construction

Pressed steel and matte black, powder-coated recessed housing

Innovative steel bracket fixing system, painted black, with allen key locking mechanism

Adjustable depth for trimless installations via thumb screws in frame




Electrical

Fixture is constant current, low voltage
16.5W per head

LED iincluded non replaceable

Ceiling mounted driver/splice box contains dimmable 0-10V driver standard

Consult factory for housing option

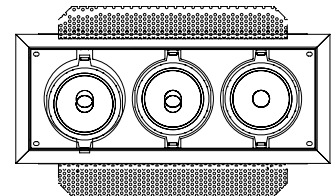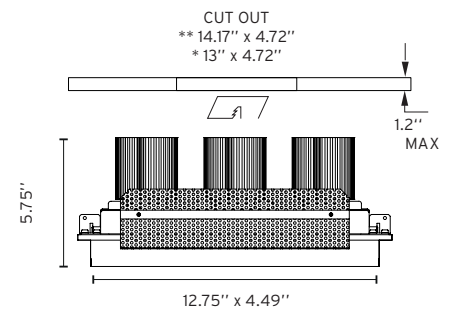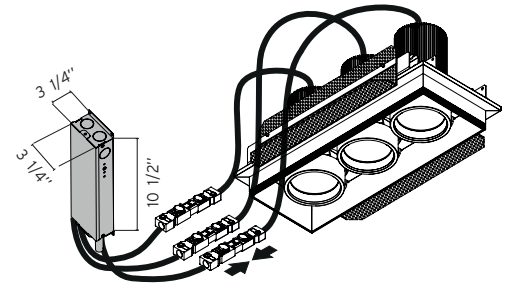


**Inaccessible ceiling

* Accessible ceiling: modular/open

Battery 3L Trimless

Ceiling Recessed Downlight


How to Specify

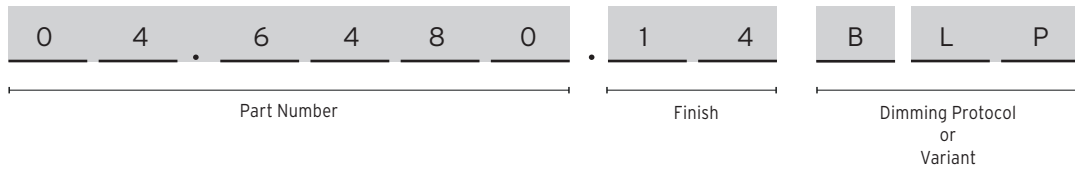

How to Specify ex. 04.6480.14BLP + 08.8525.00









QTY	Part Number	Beam Angle	Description	Delivered Lumens	Finish	Dimming Protocol
	04.6480	29°	Battery 3L, Spot, 3 x 16.5W, 3 x 2159lm, CRI80 3000K	3945 lm	■ 14 = Black	BLP = Splice Box, 1% dim, 0-10V, 120V B7X= Splice box, 1% dim,0-10V, 277V
	04.6481	44°	Battery 3L, Flood, 3 x 16.5W, 3 x 2159lm, CRI80 3000K	3666lm	■ 14 = Black	BLP = Splice Box, 1% dim, 0-10V, 120V B7X= Splice box, 1% dim,0-10V, 277V

Required Accessories

Image	QTY	Item Number	Description
		08.8525.00	Installation frame Battery 3L trimless

Battery 3L Trimless
Ceiling Recessed Downlight

Optional Accessories

Image	QTY	Item Number	Description
		08.8495.14	Honeycomb
		08.8503.64.OD	Blue Filter
		08.8503.65.OD	Sky Blue Filter
		08.8503.66.OD	Amber Filter
		08.8503.67.OD	Red Filter
		08.8503.69	Hot Light
		08.8503.CL	Old light
		08.8503.DL	Daylight
		08.8503.ND	Neodinium